




Fitting:

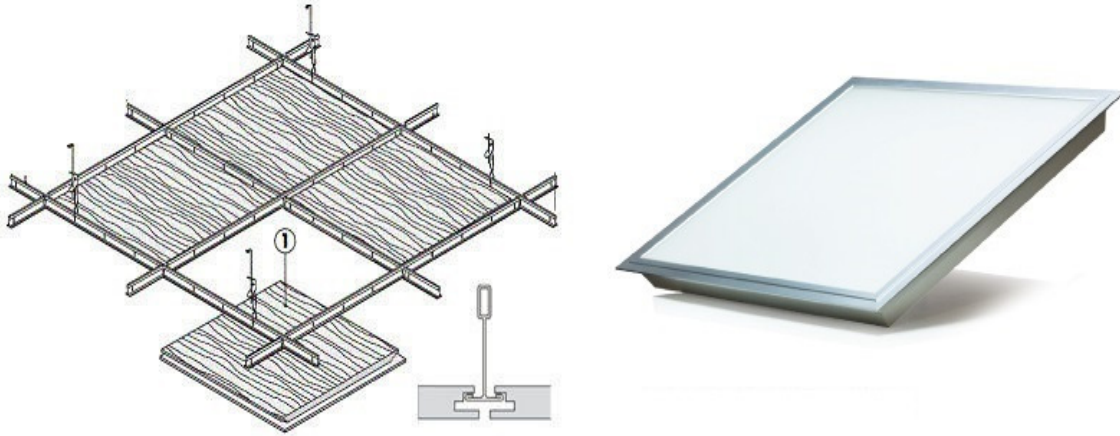

Instructions:

Lets assume you already have suspended ceiling tiles in your office
Lets also assume that your ceiling tiles at 600mm x 600mm or 1200mm x 600mm

- Step 1 - Remove 1x Ceiling Tile
- Step 2 - Replace removed tile with 1x LED Ceiling Light
- Step 3 - Repeat the process until all LED Ceiling Lights are in place

Electrics:

First of all - It is recommended that a qualified electrician is utilised

- Step 4 - Each LED Ceiling Light comes with its own bayonet fitting for power
- Step 5 - Plug this bayonet fitting power plug into each LED Light
- Step 6 - Each bayonet power has its own transformer

Power Usage:

Always check the power usage for each purchased light

- Step 7 - Once you have established the power usage for each LED Light (this is vital)

If creating 1x Light to 1x Power Switch

- Step 8 - Connect the transformer cable (extension maybe required) to your Light Switch

If creating Several x Lights to 1x Power Switch

- Step 9a - Double-check the power allowance for each LED Light (vital)
- Step 9b - Lets assume you have double-checked the power allowances
- Step 9c - Now create a daisy-chain connection between each transformer
- Step 9d - Finally, connect to the Light Switch (additional cabling maybe required)



Ceiling LED Light 600mm x 600mm


Product Specifications:

Colour Temperature	4000k	5000k	6000k
Colour Index	Ra>80	Ra>80	Ra>80
Fire Rating	V-0	V-0	V-0
Housing Material	White Powder Coated Aluminium Frame		
Input/working/voltage	AC90-277V	AC90-277V	AC90-277V
LED Quantity	144 pcs	144 pcs	144 pcs
LED Type	Epistar 2016.	Epistar 2016.	Epistar 2016.
Life Time	Up to 30,000 Hours		
luminous Flux	typ.3200	typ.3200	typ.3200
Power Factor	PF>0.95	PF>0.95	PF>0.95
Rated Power	40w	40w	40w
Starting Time	<0.5s	<0.5s	<0.5s
Viewing Angle	120 Degree	120 Degree	120 Degree
Warranty	5 Years	5 Years	5 Years
Wattage	40±5%	40±5%	40±5%

Ceiling LED Light 1200mm x 600mm

Product Specifications:

Colour Temperature	4000k	5000k	6000k
Colour Index	Ra>80	Ra>80	Ra>80
Fire Rating	V-0	V-0	V-0
Housing Material	White Powder Coated Aluminium Frame		
Input/working/voltage	AC90-277V	AC90-277V	AC90-277V
LED Quantity	264 pcs	264 pcs	264 pcs
LED Type	Epistar 2016.	Epistar 2016.	Epistar 2016.
Life Time	Up to 30,000 Hours		
luminous Flux	typ.5600	typ.5600	typ.5600
Power Factor	PF>0.95	PF>0.95	PF>0.95
Rated Power	70w	70w	70w
Starting Time	<0.5s	<0.5s	<0.5s
Viewing Angle	120 Degree	120 Degree	120 Degree
Warranty	5 Years	5 Years	5 Years
Wattage	70±5%	70±5%	70±5%

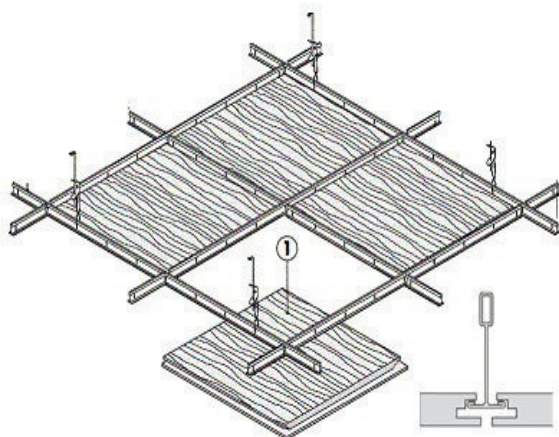



Estate Agent Supplies

Ceiling LED Light 600mm x 600mm

Purchasing

Colour Temperature	4000k	5000k	6000k
--------------------	-------	-------	-------






Purchasing	Purchasing	Purchasing
Website Ref: CEILING600-4	Website Ref: CEILING600-5	Website Ref: CEILING600-6
		
Scan to purchase	Scan to purchase	Scan to purchase

Ceiling LED Light 1200mm x 600mm

Purchasing

Colour Temperature	4000k	5000k	6000k
--------------------	-------	-------	-------



Purchasing	Purchasing	Purchasing
Website Ref: CEILING1200-4	Website Ref: CEILING1200-5	Website Ref: CEILING1200-6
		
Scan to purchase	Scan to purchase	Scan to purchase

