

LED "BEVELLED" Light Pockets - Looking to Purchase?



The '5' Basic Rules:

- 1 LED Pockets can be suspended on cables or rods, thus creating a very 'Stunning Display'
- 2 The Golden Rule with LED Displays = Each column can be 1, 2, 3 to a maximum of 4 LED's
- 3 Each additional column must have a gap between them (due to the power supply)
- 4 Each additional column must have a gap between them (recommended 150mm)
- 5 All the weight is suspended from the ceiling so, solid anchor points are crucial

LED = BEVELLED LED Type	Measurements				Power
	Width (mm)	Height (mm)	Cable Centres	Weight (approx)	Wattage
A0 Landscape	1289	941	(Rods) = 1239	30	20
A0 Portrait	914	1289	(Rods) = 892	30	20
A1 Landscape	926	679	870	25	16
A1 Portrait	679	926	623	25	16
A2 Landscape	679	505	623	15	12
A2 Portrait	505	679	449	15	12
A3 Landscape	505	382	449	4	8
A3 Portrait	382	505	326	4	8
A4 Landscape	382	295	326	3	6
A4 Portrait	295	382	239	3	6





Step 1:

1. The most important aspect of these displays is the ceiling fitting
2. Always ensure a true solid anchor on the ceiling area
3. Never anchor to a metal beam!
4. Think before you start - where is the power supply point!

Step 2:

1. Secure "Cable No 1" to your ceiling
2. Now measure the gap on the LED for the "Cable No 2"
1. Secure "Cable No 2" to your ceiling
4. You should now have 2x cables hanging loose

Step 3:

1. Example image reveals 4x LED panels
2. Secure your FIRST LED between the cables
3. LED has built-in cable grippers, a "Allan Key" will be required
4. Now decide what the gap needs to be between each LED Panels
5. Now secure all remaining LED Panels to the cables

Step 4:

1. Now plumb the bottom cables + secure into place

Step 5:

1. Now with the use of a small spirit level
2. Make finer adjustments to the actual LED Panels
3. Also remembering to keep all gaps equal between each LED Panel

Step 5:


1. Now add your power terminals to the cable
2. Now connect transformer to the power supply
3. Now turn on the power - that's it

Cable Explanation

"Cable No 1" - always comes as a standard order unit - designed for "Windows"


<p>Cable 1 Windows (Ceiling to Floor) Each Cable has 4M of Wire</p>
<p>1</p> 
<p>Supplied (2 per order) 1x Cable at 4M Length 1x Top Holder 1x Bottom Holder (Insert and locks into place)</p>

<p>Cable 2 Walls (Wall to Wall) Each Cable has 3M of Wire</p>
<p>2</p> 
<p>Supplied (2 per order) 1x Cable at 3M Length 1x Top Holder 1x Bottom Holder 1x Tensioner (Insert and tension)</p>

<p>Cable 3 Walls (Wall to Floor) Each Cable has 3M of Wire</p>
<p>3</p> 
<p>Supplied (2 per order) 1x Cable at 3M Length 1x Top Holder 1x Bottom Holder (Insert and locks into place)</p>

<p>Cable 4 Ceiling (Ceiling to Wall) Each Cable has 3M of Wire</p>
<p>4</p> 
<p>Supplied (2 per order) 1x Cable at 3M Length 1x Top Holder 1x Bottom Holder 1x Tensioner (Insert and tension)</p>

"LED LANDSCAPE" - Measurements - Reveals 3x Drops + Crucial Gaps

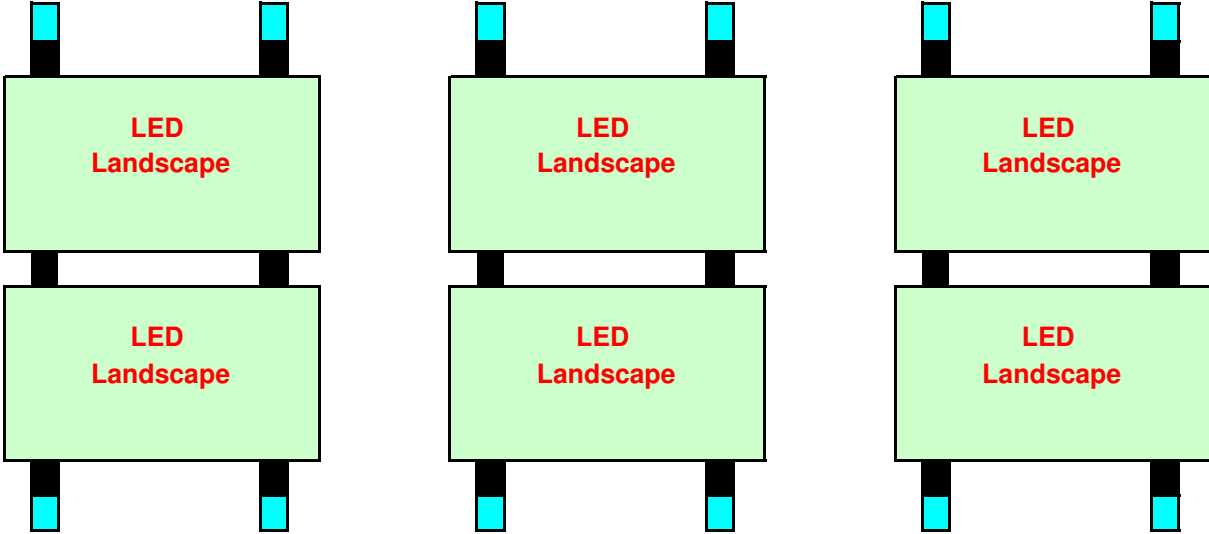

Gaps

Between LED = 150mm

Why?

- 1. Looks pleasing on the eye
- 2. Allow access to the front


End Gaps:

These can be reduced to fit
However; 150mm look good

Just remember, gaps are vital
to allow access to the fronts!

"Gap 150 <	A4 Landscape 382 mm	>	"Gap 150 <	A4 Landscape 382 mm	>	"Gap 150 <	A4 Landscape 382 mm	>	"Gap 150 <	Total Space 1746 mm
"Gap 150 <	A3 Landscape 505 mm	>	"Gap 150 <	A3 Landscape 505 mm	>	"Gap 150 <	A3 Landscape 505 mm	>	"Gap 150 <	Total Space 2115 mm
"Gap 150 <	A2 Landscape 697 mm	>	"Gap 150 <	A2 Landscape 697 mm	>	"Gap 150 <	A2 Landscape 697 mm	>	"Gap 150 <	Total Space 2691 mm

"LED PORTRAIT" - Measurements - Reveals 3x Drops + Crucial Gaps

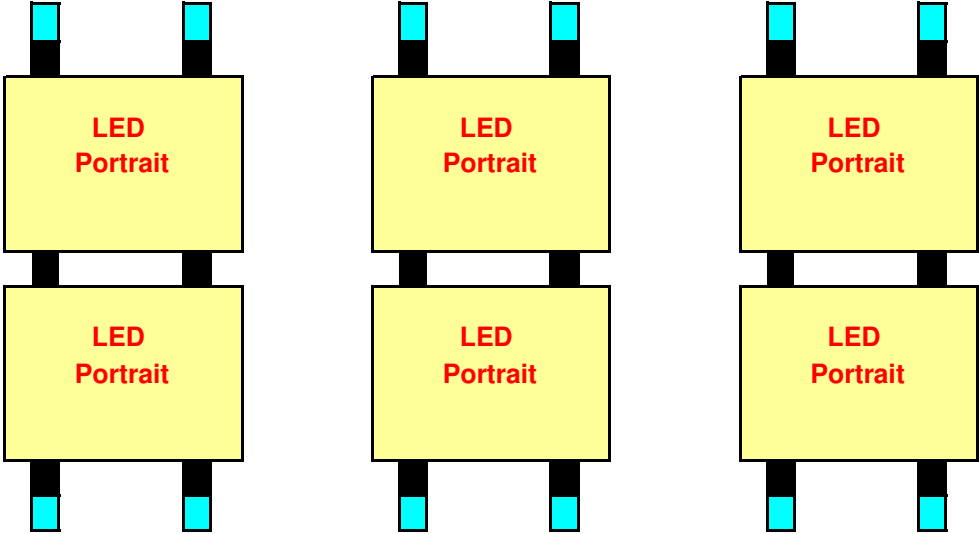

*Gaps

Between LED = 150mm

Why?

- 1. Looks pleasing on the eye
- 2. Allow access to the front

End Gaps:

These can be reduced to fit
However; 150mm look good

Just remember, gaps are vital
to allow access to the fronts!

"Gap 150 <	A4 Portrait 295 mm	>	"Gap 150 <	A4 Portrait 295 mm	>	"Gap 150 <	A4 Portrait 295 mm	>	"Gap 150	Total Space 1485 mm
"Gap 150 <	A3 Portrait 382 mm	>	"Gap 150 <	A3 Portrait 382 mm	>	"Gap 150 <	A3 Portrait 382 mm	>	"Gap 150	Total Space 1746 mm
"Gap 150 <	A2 Portrait 505 mm	>	"Gap 150 <	A2 Portrait 505 mm	>	"Gap 150 <	A2 Portrait 505 mm	>	"Gap 150	Total Space 2115 mm