Type
 Website Ref:

 Wall =
 WALL1


 Window =
 WINDOW1


- 4 x Poster Acrylics
- 2 x Cables (Floor to Ceiling 4M Lengths)
- **16** *x* Single Grippers
- **0** x Double Grippers
- 2 x Top & Bottom Holders





- Page 1 Parts to options & images
- Page 2 Fitting Instructions
- Pages 3 to 7 Drawings



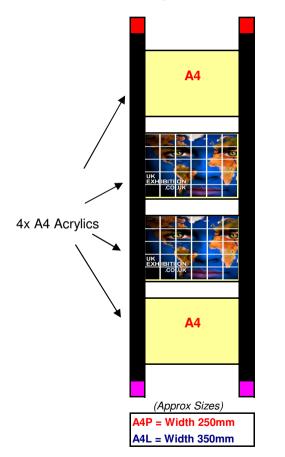


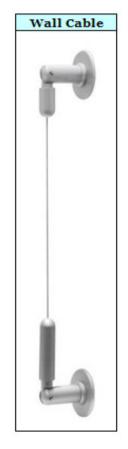













W250mm (approx)



Fitting Instructions - Step 1

- 1 Decide where your display will start (We would advise working left to right)
- 2 Attach one of the top connectors to your top windowsill or ceiling (comes in 2x parts) connect the smaller section
- 3 Warning = Top connectors supports all the weight so, ensure a secure fitting, use your own unique screws if necessary!
- 4 Thread supplied cable through the second section and screw bass connector tightly to the cable, screw this to the top connector

Fitting Instructions - Step 2

- 1 When deciding the location of the next cable
- 2 We would recommend that you lay the acrylic on the floor and attach the required grippers to it
- 3 Once you have them attached measure the gap between the gripper cable holding section on both grippers (left & right)
- 4 You now have the correct measurement!
- 5 Now connect cable two to the top windowsill or ceiling
- 6 At this point you should have two cables hanging and single and double grippers attached

Fitting Instructions - Step 3

Pending how many columns you are adding - be they a seamless run or individual columns

Individual Columns - Repeat the above exercise however; make sure you add the required gaps between the displays

Seamless Columns - Do not forget that the double grippers are wider than the single grippers - you must allow for this!

Fitting Instructions - Step 4

- 1 Acrylics Decide where the first acrylic wants to be attached
- 2 Now move the grippers to the required location, secure to the cable then, secure to the acrylic
- 3 At this point your acrylic should be attached in four corners and onto two cables
- 4 Repeat this process left to right ensuring acrylics are level all the way across the display
- 2nd row we recommend a gap between acrylics of **5cms**
- 6 Repeat this process for the 2nd row and keep repeating for all desired / ordered rows

Fitting Instructions - Step 5

- 1 Bottom connector, plumb the cable and mark on the required connection area, now secure smaller section with a screw
- Once completed re-attach the top section
- 3 This is spring loaded hang the cable flush with the floor then, cut to desired length then, insert into the bottom section
- 4 If the cable is still loose, re-cut the cable TAKE YOUR TIME and re-try
- 5 Big warning If you rush the cable cutting and cut it to short you are buggered, so, take your time DO NOT RUSH

Type Wall = Window = WINDOW2 8 x Poster Acrylics 3 x Cables (Floor to Ceiling 4M 16 x Single Grippers 8 x Double Grippers 3 x Top & Bottom Holders	Type Wall = Window = WALL3 WINDOW3 12 x Poster Acry 4 x Cables (Floration of the company o	ylics por to Ceiling 4M Lengths opers ippers	5	Single Gri Double Gr	rylics oor to Ceiling	g 4M Lengths)
A4 A4	A4 A4	A4	A4	A4	A4	A4
A4	A4	A4	A 4	UK SON BITTON COURT	UK, EXHERT DAY	A4
A4	DK SH BH ON COOL W	UK PENNEST ON COUR	UK EXHIBIT ON TOURS	A4	A4	UK EXHIBITION COUNTY
A4 A4	A4 A4	A4	A4	A4	A4	A4
(Approx Measurements) A4P = Width 500mm A4L = Width 700mm	(Approx Measurements) A4P = Width 750mm A4L = Width 1050mm		(Approx Mea A4P = Width A4L = Width	1000mm		

Website Ref: Website Ref: Type Type WALL5 WALL6 Wall = Wall = WINDOW5 WINDOW6 Window = Window = **20** *x* Poster Acrylics 24 x Poster Acrylics **6** *x* Cables (Floor to Ceiling 4M Lengths) 7 x Cables (Floor to Ceiling 4M Lengths) **16** *x* Single Grippers **16** x Single Grippers 32 x Double Grippers **40** x Double Grippers 6 x Top & Bottom Holders 7 x Top & Bottom Holders **A**4 **A4 A4 A4** Α4 **A4 A4** CO UK **A4 A4 A4 A4 A4 A4 A4 A4 A4 A4 A4** (Approx Measurements) (Approx Measurements) A4P = Width 1250mm A4P = Width 1500mm

A4L = Width 2100mm


A4L = Width 1750mm

Type Wall = Website Ref: WALL7

Window =

WINDOW7

- 28 x Poster Acrylics
- 8 x Cables (Floor to Ceiling 4M Lengths)
- **16** *x* Single Grippers
- 48 x Double Grippers
- 8 x Top & Bottom Holders

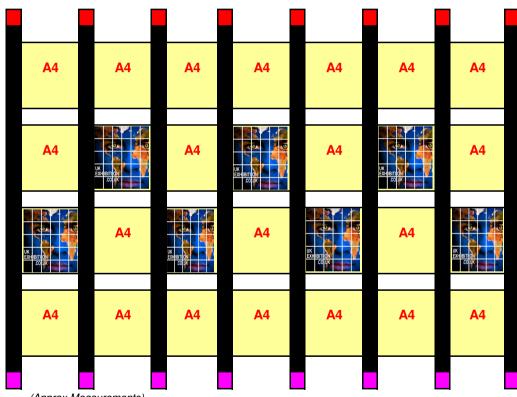

(Approx Measurements)

A4P = Width 1750mm

A4L = Width 2450mm



Options

All shown options are examples of what will be supplied with each listed option and price on our website

However

We understand that clients may want a different set up

IF this is the case

Please do not hesitate in calling us as we can design the perfect system to reflect your own business needs


Tel: 01244 470903

Type Website Ref:
Wall = WALL8

Window =

WINDOW8

- **32** *x* Poster Acrylics
- **9** x Cables (Floor to Ceiling 4M Lengths)
- **16** *x* Single Grippers
- **56** x Double Grippers
- 9 x Top & Bottom Holders

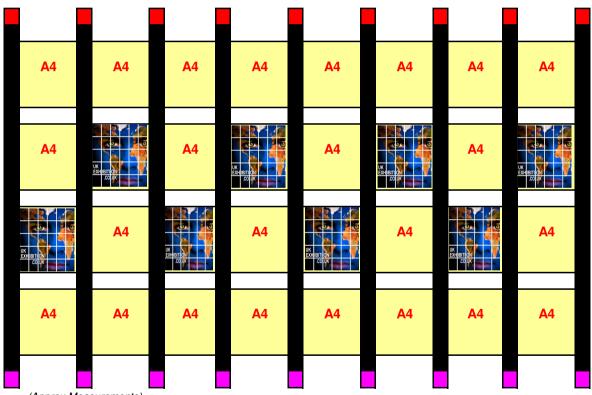

(Approx Measurements)

A4P = Width 2000mm A4L = Width 2800mm

(EAS) - Tel: 01244 470903



Options

All shown options are examples of what will be supplied with each listed option and price on our website

However

We understand that clients may want a different set up

IF this is the case

Please do not hesitate in calling us as we can design the perfect system to reflect your own business needs

Tel: 01244 470903

Туре Wall = Website Ref: WALL9 WINDOW9

Window =

36 *x* Poster Acrylics


10 *x* Cables (Floor to Ceiling 4M Lengths)

16 *x* Single Grippers

64 *x Double Grippers*

10 *x* Top & Bottom Holders



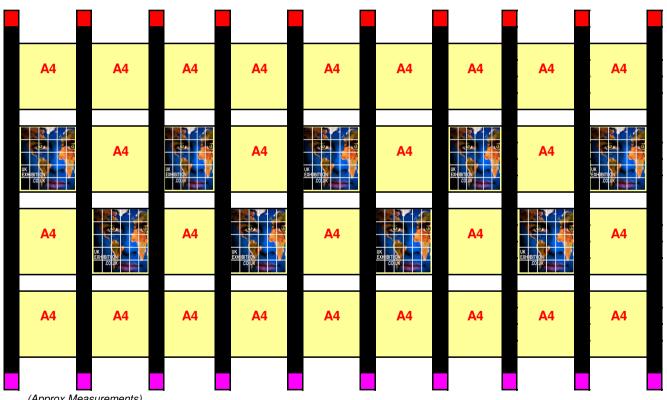

(Approx Measurements)

A4P = Width 2250mm A4L = Width 3150mm