



A2P Acrylic Sizes

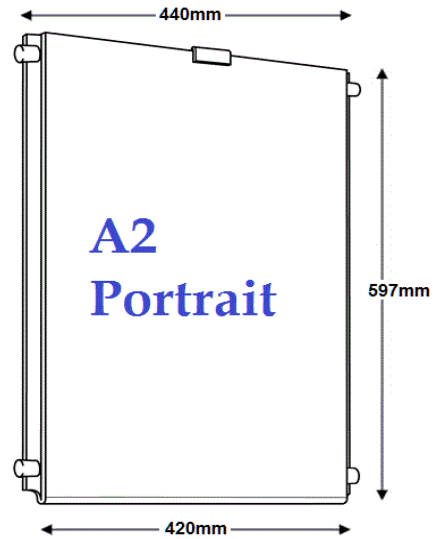

A4L Acrylic Sizes

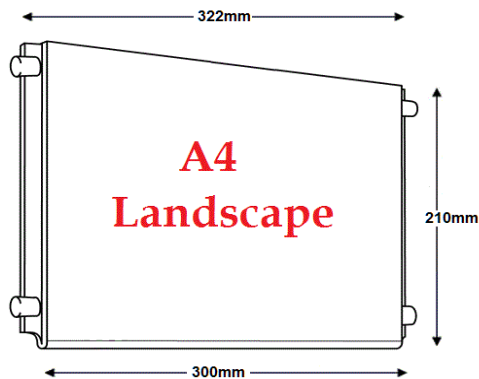


Page 1 - Components
Page 2 - Fitting Instructions
Page 3 - Option 1 + Option 2

Grippers (Single + Double)




Acrylics with Cable and Grippers Fitted

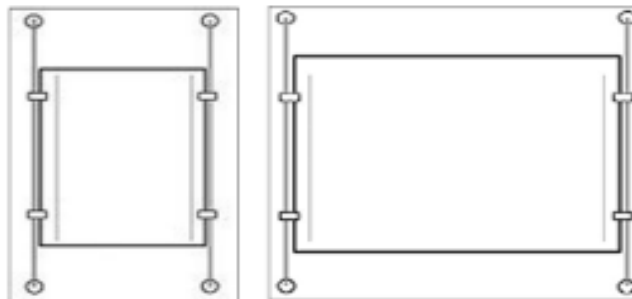

Need Help / Advice? = Tel: 01244 470903



Cables - (Ceilings + Walls)

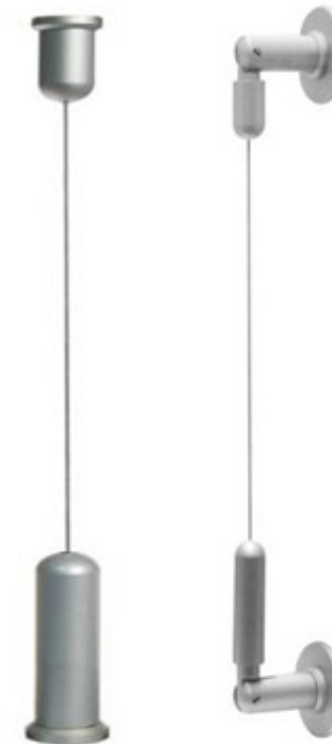

Fitting Instructions - Step 1

- 1 Decide where your display will start - (We would advise working left to right)
- 2 Attach the first top ceiling connector - to your ceiling - see 3
- 3 **Warning** = Top connectors supports all the weight so, ensure a secure fitting!
- 4 Secure the cable to the ceiling connector - and let it hang loose

**Fitting Instructions - Step 2**

- 1 When deciding the location of the next cable
- 2 We would recommend that you lay the acrylic on the floor and attach the required grippers to it
- 3 Once you have them attached - measure the gap between the gripper cable holding section on both grippers (left & right)
- 4 You now have the correct measurement!
- 5 Now connect cable two to the top windowsill or ceiling
- 6 *At this point you should have two cables hanging and single and double grippers attached*

Fitting Instructions - Step 3

- 1 Pending on the type of grippers supplied - some connect from the side and some slide onto the cable
Let's assume your grippers slide in from the side.....
- 2 Now connect your first acrylic using the grippers onto the cables
Just remember to add single grippers on the outside cables and double grippers on the central cables
- 3 Now with a small spirit level - make finer adjustments to level out the acrylic

Fitting Instructions - Step 4


- 1 All additional cables - just repeat steps 1 to 3

Fitting Instructions - Step 5

- 1 Some of the central cables hold 'Single' + 'Double' Grippers
- 2 Just follow the given image to calculate where a 'Single' or 'Double' Gripper, is required


**Fitting Instructions - Step 5**

- 1 Bottom connector, plumb the cable and mark on the required connection area, now secure with a screw
- 2 Attach the cable to the bottom connector + keep repeating until the bottom cables are all connected
- 3 Of course you will need to cut-out any excess cable - take your time here as once cut - it's cut!
- 4 Now check all acrylics with the spirit level, once finer adjustments are done - **That's it**

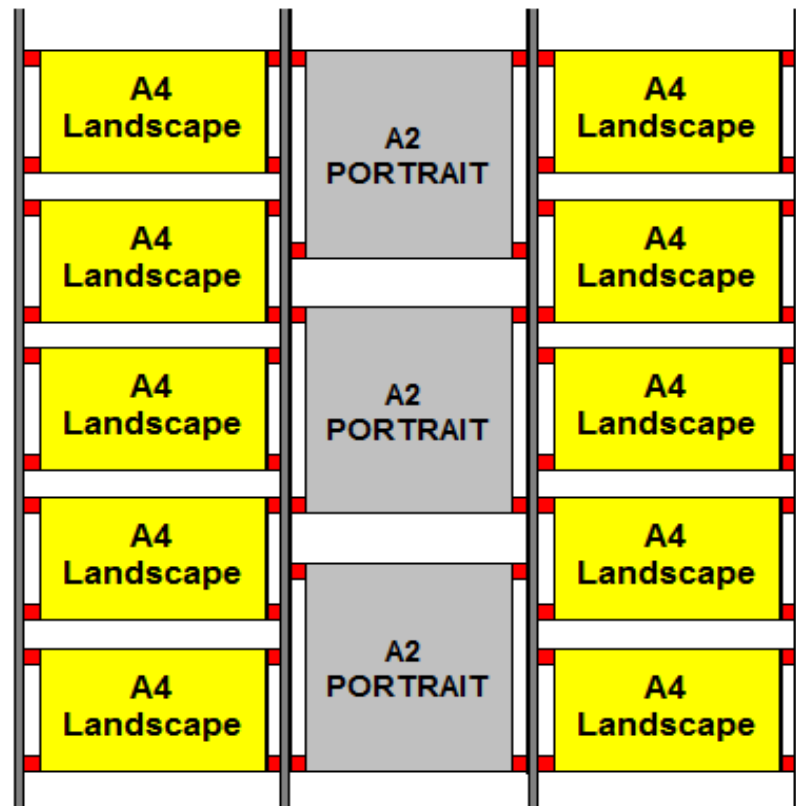

Option 1 - Overall Width = **W1150mm** (Approx)

- 10 x A4 Landscape Acrylics
- 3 x A2 Portrait Acrylics
- 4 x Cables - Window Cables 4M or Wall Cables 3M
- 28 x Single Grippers
- 8 x Double Grippers

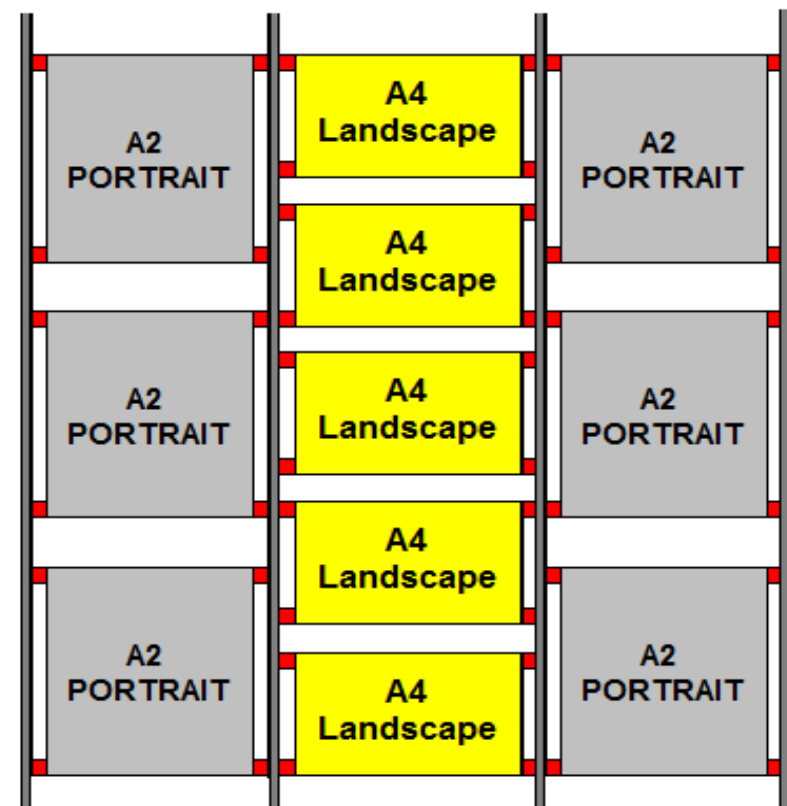

Option 2 - Overall Width = **W1240mm** (Approx)

- 5 x A4 Landscape Acrylics
- 6 x A2 Portrait Acrylics
- 4 x Cables - Window Cables 4M or Wall Cables 3M
- 18 x Single Grippers
- 8 x Double Grippers